


Frame Brace & Frame Support Tube Options

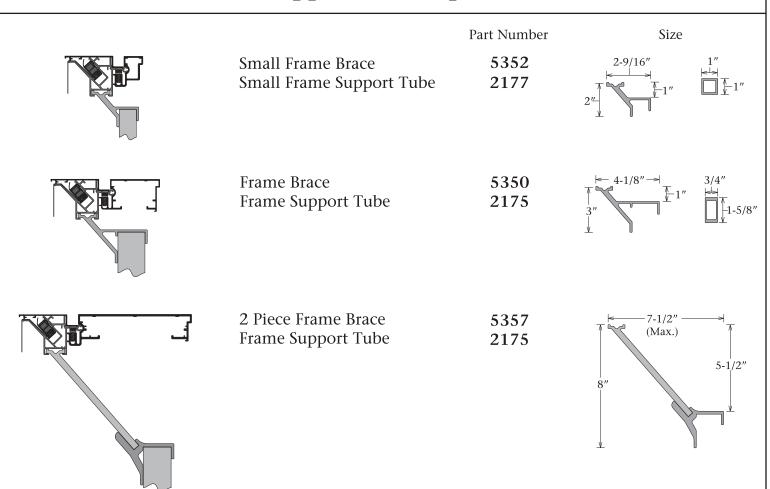

Frame Brace & Frame Support Tube Placement

DUAL FRAME, TENSION FRAME & DUAL DIVIDER

Place a vertical Frame Brace and Frame Support Tube approximately every 36" on center. Cut and insert horizontal pieces of Frame Support Tube approximately every 36" in between the vertical assemblies.

RETRO FRAMES

Applications where the Retro Frame carries the compression load, placement of the Frame Brace and Frame Support Tube is the same as the Dual Frame, Tension Frame and Dual Divider.

